

# STOCK CEDAR ROOFING

## CEDAR SHAKES—MEDIUM SELECT 24"



**1/2" to 3/4" Nominal Thickness (Mediums)**

**5 bundles per square**

These shakes have split faces and sawn backs. Cedar logs are first cut into desired lengths. Blanks or boards of proper thickness are split and then run diagonally through a band saw to produce two tapered shakes from each blank.

## CEDAR SHINGLES—#1 PERFECTION 18"




**5/8" Butt Thickness**

**4 bundles per square**

The term "Perfection" refers to all red cedar shingles that are 18", (457mm) in length, in all grades. Perfection shingles are 0.45" (11.4mm) thick, (nominal - all grades). The recommended exposure for an 18" shingle roof is 5-1/2" (140mm) for a 3-ply, water tight construction.

## CEDAR HIP & RIDGE

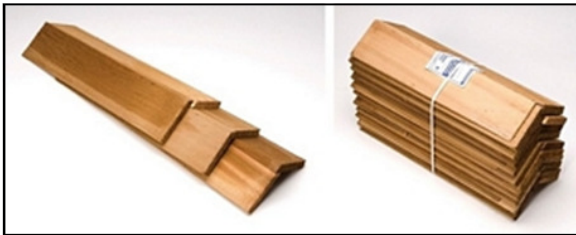

**24" Tapersawn**

**16.5 lineal feet per bundle**

Hip & Ridge Units are pre-manufactured, labor saving caps for hips and ridges. These products are made from the same red cedar resource shakes for a high quality, perfect match.

## SPECIALTY ACCESSORIES

**18" X 72' Jumbo 30# Shake Felt**

**Cedar Breather® Ventilated Underlayment**



**ShingleVent® II 7"**



**SD SQUARE DEAL  
BUILDING SUPPLY**

Sterling Height • (586) 731-3670

Almont • (810) 798-2727

Grand Rapids • (616) 538-6660

Ludington • (231) 843-3235